


TOOLS REQUIRED

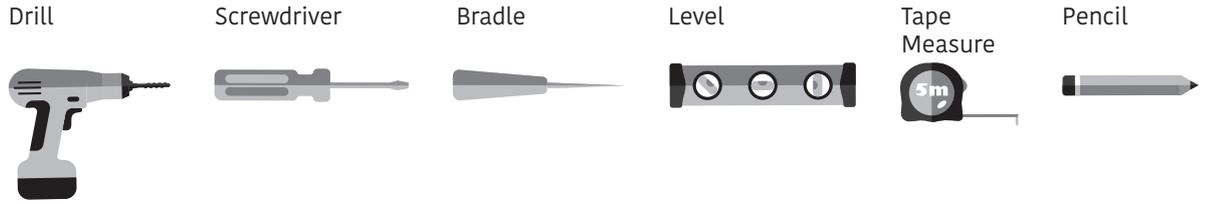

PRECAUTIONS

- ▶ Hand screw the fixings only. Do not use power tools as it may break the glass mirror.
- ▶ We recommend a qualified person installs the mirror
- ▶ Install the mirror at a height above the basin where water will not splash on it. Approx. 200mm up from the basin. The mirror warranty is void if installed below 150mm from the basin top.
- ▶ Use secure wall fixings appropriate for you wall type
- ▶ We recommend two people to install heavy or large mirrors
- ▶ To avoid damage use a soft mat or rug for putting the mirror down on while installing
- ▶ Handle mirror with extreme care.
- ▶ Do not strike the mirror glass with hard or pointed objects
- ▶ Do not place hot or cold items against the glass.
- ▶ Keep you workspace clean & clear of obstacles

MAINTENANCE

- ▶ For a safe and excellent chemical cleaner option please contact us.
- ▶ Alternatively when cleaning the glass always use a damp cloth with no chemical cleaners. Many glass cleaners have chemicals (acid base) which will attack the silver mirror edges and voiding the warranty.
- ▶ Do no use a scouring pad.
- ▶ Please retain this for future reference


STEP 1

Check the wall is straight / level. If the wall is bowed it may cause the mirror to break during installation.

If bowed packing or levelling of the wall is required.


STEP 2

Use a spirit level and pencil to mark mirror position. Ensure the mirror is at least 150mm minimum up from basin. This will avoid water damage to the mirror edges.

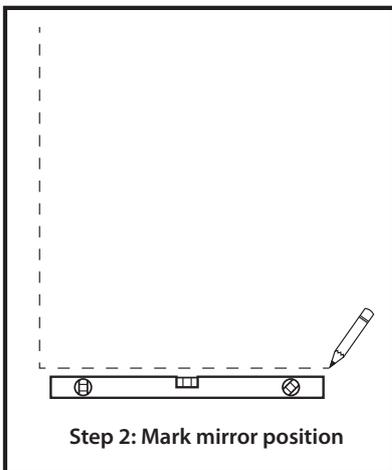

STEP 3

Hold the mirror in position whilst a second person marks the wall through the centre of the holes (use a nail or bradle).

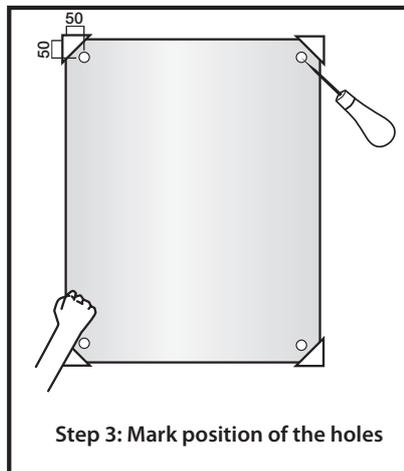

STEP 4

If drilling into gib board (and no wooden stud in behind) firstly insert the nylon anchor in the gib board or use another suitable hollow wall anchor in the exact centre of the mark on the wall.

STEP 5

Remove the plastic corners and ensure the mirror is not placed on any hard surface such as tiles or ceramic basin.


With the aid of a second person hold the mirror carefully into position on the wall .

Depending on your fixing kit either insert the black rubber bush into the mirror hole and screw the mirror to the wall OR place the brass thread and clear rubber washer (in this sequence) onto the screw and screw the mirror to the wall.

Finger tight only, do not over screw or use power tools as it may cause the mirror to crack. If the wall is bowed do not bend the mirror or the corner will snap. Level the wall or pack out the wall unevenness .

STEP 6

Screw the chrome dome / cap onto the black bush or brass thread . Clean the mirror using a damp cloth or neutral mirror cleaner. Many glass cleaners have an acidic base which will attack the silver edges and void the warranty. Please contact us for an excellent and safe chemical cleaner.

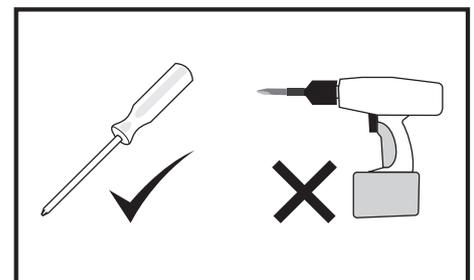

Do not use power tools to tighten the screw

DISCLAIMER

THIS MIRROR CARRIES A FULL WARRANTY, PLEASE INSPECT THOROUGHLY BEFORE INSTALLATION TO ENSURE THIS UNIT HAS NO DAMAGE OR DEFECTS AS THE WARRANTY DOES NOT COVER THE COST OF REMOVAL AND INSTALLATION ONCE INSTALLED. THE MANUFACTURER IS NOT RESPONSIBLE FOR ANY DAMAGE TO GOODS,PROPERTY OR PERSONAL INJURY WHILST BEING FITTED.